

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 September 2001 (27.09.2001)

PCT

(10) International Publication Number
WO 01/72057 A2

(51) International Patent Classification⁷: H04Q 7/00

(21) International Application Number: PCT/SE01/00552

(22) International Filing Date: 16 March 2001 (16.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/190,097 20 March 2000 (20.03.2000) US
60/191,499 23 March 2000 (23.03.2000) US
09/801,869 9 March 2001 (09.03.2001) US

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors: RUNE, Göran; Sandgårdsgatan 5A, S-582 52 Linköping (SE). WILLARS, Per; Rindögatan 19, S-115 36 Stockholm (SE). VAN LIESHOUT, Gert-Jan; Soerenseweg 40, NL-7314 CG Apeldoorn (NL).

(74) Agent: MAGNUSSON, Monica; Ericsson Radio Systems AB, Patent Unit Radio Access, S-164 80 Stockholm (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TRANSPORT OF RADIO NETWORK-ORIGINATED CONTROL INFORMATION

(57) Abstract: In a radio access network (RAN) where information may be sent to a mobile radio unit using a shared radio channel shared by other mobile radio units, a first transport bearer is established between a first RAN node, e.g., a drift RNC, and a second RAN node, e.g., a base station, to transport data to be transmitted on the shared radio channel. A second transport bearer is established between the first and second RAN nodes to transport control information originated in the first RAN node that relates to the first transport bearer data. The first RAN node then transmits the control information over the second transport bearer to the second RAN node. The control information might include, for example, scheduling information known to the first RAN node because the first RAN node supervises scheduling of data to be transmitted on the shared radio channel. The control information may provide to the mobile radio unit information needed to decode the data transmitted on the shared radio channel. Such needed information might include, for example, a frame identifier, a specific radio resource like a spreading code, and/or an indication of how different radio resources associated with different connections are multiplexed on the shared radio channel. In one example, non-limiting embodiment, the control information includes transport format indication information such as transmit format combination indicator (TFCI) information employed in third generation Universal Mobile Telephone Systems (UMTS) in accordance with the 3GPP specification.

WO 01/72057 A2

TRANSPORT OF RADIO NETWORK-ORIGINATED CONTROL INFORMATION

RELATED APPLICATIONS

This application claims priority from commonly-assigned U.S. Provisional Patent
5 Application Serial Nos. 60/190,097 and 60/191,499, filed March 20, 2000 and March 23,
2000, respectively, the entire contents of which is incorporated herein by reference.

FIELD OF THE INVENTION

The present invention relates to radio access, more specifically, to how certain
control information communicated to a mobile radio terminal can be efficiently
10 transported in a Radio Access Network (RAN).

SUMMARY OF THE INVENTION

In a radio access network (RAN) where information may be sent to a mobile radio
unit using a radio channel shared by other mobile radio units, a first transport bearer is
established between a first RAN node and a second RAN node to transport data ultimately
15 to be transmitted on the shared radio channel. A second transport bearer is established
between the first and second RAN nodes to transport control information originated in
the first RAN node that relates to the first transport bearer data. The first RAN node then
transmits the control information over the second transport bearer to the second RAN
node.

20 The control information might include, for example, information known to the first
RAN node because the first RAN node supervises scheduling of data to be transmitted on
the shared radio channel. The control information may provide the mobile radio unit with
information needed to decode the data transmitted on the shared radio channel. Such
needed information might include a frame identifier, a specific radio resource like a
25 spreading code in a CDMA type of communication system, and/or an indication of how
different radio resources are multiplexed on the shared radio channel. In one example,
non-limiting embodiment, the control information includes transport format indication

information such as transmit format indicator (TFI) and/or transmit format combination indicator (TFCI) information employed in third generation (3G) Universal Mobile Telephone Systems (UMTS) systems in accordance with the 3GPP specification.

5 In a preferred, example embodiment, the first RAN node is a drift radio network controller (DRNC), and the second RAN node is a base station (BS). A third transport bearer may be established to transport dedicated radio channel data and dedicated radio channel control information through the RAN for transmission to a mobile radio unit on a dedicated radio channel. This third transport bearer may be established by a serving radio network controller (SRNC) working in conjunction with the DRNC to support the
10 connection with the mobile radio unit.

In one example implementation of the present invention, a computer-generated data signal, (e.g., generated in a computer in the DRNC), is transported on a separate transport bearer between the DRNC and the base station having a particular format. A frame number field includes a specific frame number identifying a frame on the shared
15 radio channel. A transport format indicator field includes information relating to a particular radio channel resource in the corresponding frame. In one example implementation, the transport format indicator field includes an index to a transport format table previously stored in the mobile radio unit. In other words, the index addresses particular entries in the look-up table so the mobile can retrieve certain
20 information that will allow it to receive and decode information intended for that mobile radio unit on the shared radio channel. For example, since the DRNC is in charge of scheduling how data is multiplexed in a frame on the shared radio channel and allocating particular radio resources, such as channelization codes and associated spreading factors, the DRNC can convey to the mobile radio, using the transport format indicator, these
25 types of specific details to allow the mobile radio unit to decode information sent over the shared radio channel.

BRIEF DESCRIPTION OF THE DRAWINGS

The objects, features, and advantages of the invention will be apparent from the following description of the preferred but non-limiting example embodiment described in conjunction with the following drawings. The drawings are not necessarily to scale or
5 comprehensive, emphasis instead being placed upon illustrating the principles of the invention.

Fig. 1 is a function block diagram of a radio communications system in which the present invention may be employed;

Fig. 2 is an example transport format indicator (TFI) signaling message;

10 Fig. 3 is an example radio access network architecture in which certain control information (like TFI and/or TFCI messages) to be communicated to a mobile radio terminal is transported in the radio access network architecture;

Fig. 4 shows an example embodiment of the present invention in which a transport format indicator originated in a DRNC is communicated from the DRNC to a base station
15 over a separate transport bearer;

Fig. 5 is a flowchart diagram illustrating procedures in accordance with one example implementation of the present invention;

Fig. 6 is an example signaling procedure for setting up a separate transport bearer between a DRNC and a base station for communicating DRNC-originated control
20 information; and

Fig. 7 shows an example of implementation of the invention in a differently configured RAN.

DESCRIPTION OF THE FIGURES

In the following description, for purposes of explanation and not limitation, details
25 are set forth pertaining to a specific RAN architecture, having certain interfaces, signaling,

and messages, in order to provide an understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced in other implementations, embodiments, and contexts that depart from these specific details.

In some instances, detailed descriptions of well-known methods, interfaces, devices, and signaling techniques are omitted so as not to obscure the description of the present invention with unnecessary detail. Moreover, individual function blocks are shown in some of the figures. Those skilled in the art will appreciate that the functions may be implemented using individual hardware circuits, using software functioning in conjunction with a suitably programmed digital microprocessor or general purpose computer, using an application specific integrated circuit (ASIC), and/or using one or more digital signal processors (DSPs).

The architecture of an example Radio Access Network (RAN) 13, the interfaces between nodes in the RAN 13, and the physical channels on the radio interface are now described with reference to the radio communications system 10 shown in Fig. 1. User Equipment (UE) 22, such as a mobile or fixed radio terminal, is used by a subscriber to access services offered by one or more core networks (CN) 12 (only one is shown). Examples of core networks include the PSTN, the ISDN, the Internet, other mobile networks, etc. Core networks may be coupled to the radio access network 13 through circuit-switched and/or packet-switched core network service nodes like Mobile Switching Center (MSC) (not shown) or a Serving GPRS Support Node (SGSN) (not shown). The radio access network 13 typically includes plural Radio Network Controllers (RNCs) 14, 16. Each RNC controls radio connectivity with mobile terminals within a geographical area, e.g., one or more cells, by way of one or more base stations (BS) 18, 20.

For each connection between a UE mobile terminal 30 and a core network node 12, an RNC may perform one of two roles. As a Serving RNC (SRNC) 18, the RNC controls the connection with the mobile terminal within the RAN. Sometimes, while a connection is active, the mobile terminal moves to a geographical area controlled by another RNC. This other RNC via which the connection is routed to the mobile terminal is called a Drift RNC (DRNC) 16. In the DRNC role, the RNC supports the SRNC by

supplying radio resources controlled by the DRNC that are needed to support the connection with the mobile terminal. The DRNC is connected to the SRNC through a logical interface labeled Iur. Although there is only one SRNC, there may be more than one DRNC involved in a mobile terminal-CN connection, depending on any movement of the mobile terminal and radio environment conditions.

A Base Station (BS) node (18, 20), (sometimes called a "Node B"), provides UE radio connectivity in one or more cells. Each cell covers a limited geographical area. A base station is coupled to and controlled by a Controlling RNC (CRNC). A CRNC can be an SRNC or a DRNC. The CRNC performs admission control for all the resources of the base stations it is controlling. In addition, the CRNC performs the scheduling of common and shared physical channels (as described below) on the radio interface for these BSs. In Fig. 1, the RNC 14 labeled "SRNC" is the CRNC for base station (BS1) 18. The RNC 16 labeled "DRNC" is the CRNC for base station (BS2) 20. A base station is connected to its CRNC through a logical Iub interface.

User data is transported on logical "transport bearers" over the Iub/Iur interfaces between the different nodes in the RAN. A transport bearer typically transports one transport channel including user data information (an information stream), and possibly also control information like cyclic redundancy check (CRC), bit error rate (BER), transport format indicators like TFIs and/or TFCIs (described below), etc. Depending on the transport network used, these logical transport bearers may, for example, be mapped to actual ATM Adaptation Layer 2 (AAL2) transport connections (in the case of an ATM-based transport network) or User Data Protocol (UDP) transport connections (in the case of an IP-based transport network).

The radio interface may include two groups of physical radio channels:

- (1) dedicated physical channels (referred to as DCH in the 3GPP specification) and
- (2) shared physical channels (referred to as DSCH in the 3GPP specification). Dedicated physical channels may be used for transporting information between a single UE terminal and a core network and are not shared or used by other mobile terminals. A shared physical channel may be used by multiple UE terminals, e.g., using a multiplexing scheme

such as code or time division multiplexing. One or more transport bearers are mapped to a physical radio channel.

When a DRNC provides resources for a mobile terminal-core network (CN) connection, there are different DRNC control functions for dedicated types of physical channels and for shared types of physical channels. For dedicated physical channels, the DRNC is involved in admission control because it must commit DRNC resources, (e.g., radio resources like spreading codes in a CDMA type system), to support the UE terminal-CN connection. Once the DRNC commits some of the resources it controls to support the UE terminal-CN connection, the DRNC is not responsible for scheduling or other supervising of the physical channel resources for that UE terminal-CN connection. Instead, this responsibility is handled by the SRNC. However, the DRNC may inform the SRNC of local conditions, like a congestion situation in a cell, and may request the SRNC to change the information rate on the dedicated physical channel.

For shared physical channels, the DRNC is again involved in admission control when the mobile UE terminal-core network (CN) connection is established, to the extent its DRNC resources are needed to support that connection. After the DRNC commits its resources to support the UE terminal-CN connection, however, the DRNC must perform one or more additional control or supervisory functions. Because a shared physical channel is used by multiple UE terminals, the DRNC -- not the SRNC -- performs the final scheduling of the resources on the shared physical channel.

In the downlink (DL) direction from RAN to the UE terminal, due to the last moment resource scheduling in the DRNC, the UE terminal typically does not know which shared physical channel resources, will be used by the RAN for its UE terminal-CN connection at each moment in time, e.g., spreading codes, frame multiplex times, etc. In order to overcome this uncertainty, (1) the UE terminal may monitor continuously all shared physical channel resources to detect which resources are used for its connection, or (2) the RAN can inform the UE terminal about the common/shared resources it is using to support that UE terminal connection at each point in time. For the second approach (2), the RAN must continuously inform the UE terminal about the shared

physical channel resources used at each moment in time. To accomplish this, the RAN must send to the UE resource identification/allocation messages on a parallel-established, dedicated radio channel before the UE is to receive the information on the shared radio channel.

5 Radio channel information streams are transported in the RAN between the SRNC and the involved BS on transport bearers over the Iub and Iur interfaces. A transport bearer transports information related to either a dedicated physical radio channel or a shared physical radio channel. The information carried on a transport bearer used for transporting information related to a dedicated physical channel passes essentially
10 transparently through the DRNC. However, in diversity handover connections, the DRNC may perform a combining (uplink from each BS)/splitting (downlink to each BS) functions for this information because multiple base stations coupled to the DRNC are supporting the UE terminal-CN connection. If the DRNC does not need to perform such combining/splitting, e.g., the two BSs are under the same DRNC, the DRNC need not
15 manipulate the transported information in neither the uplink nor downlink direction. In this case, the DRNC functions like a conduit or relay node.

For information carried on a transport bearer relating to shared physical channels, the DRNC must schedule the physical radio channel-related information received for different mobile terminals from one (or possibly more) SRNCs, i.e., multiplex different
20 information streams onto the shared radio channel at different times using different radio resources. The goal is to optimize use of the shared physical channel resources on the radio interface. In addition, the DRNC may perform a rate control function with the SRNC, i.e., the DRNC requests the SRNC to slow down its data transmission in order to avoid congestion on the shared physical channel.

25 The issue is how to get this and other kinds of control information originating at the DRNC to the mobile radio so it knows when and how to decode the information sent to it on the shared radio channel. Indeed, the timing of the physical channel information transport in the RAN is important for successful communication over the shared channel. For scheduling control, the information transported in the downlink is labeled with a -

timestamp indicating when the information needs to be sent over the radio interface. The base stations may use a receive "window" when receiving data from an SRNC or a DRNC. If data is received within the window, that data can be processed and transmitted on the radio interface. If the information is received too early, the base station may not have enough buffer capacity to temporarily store the received information. If the information is received too late, the base station may not have enough time to process the received information and send it out on the radio interface at the correct moment in time. The signaling on the Iub/Iur interfaces can support procedures, (e.g., a timing adjustment request message), by which the base station can request its CRNC (for shared physical channels) or an SRNC (for dedicated physical channels) to adjust the time at which information is sent to the base station.

One way in which the identity of particular physical channel resources to be used, (e.g., radio resources like spreading codes), and how these resources are to be used, (e.g., type of channel coding and coding rate), may be communicated by the RAN to the mobile terminal is through the use of Transport Format Indication (TFI) and/or Transport Format Combination Indication (TFCI) control messages employed in the 3GPP specification. The invention is not limited any specific type of transport control message format or information. The TFI and TFCI are simply examples.

A TFI or TFCI message may be used to describe these kinds of characteristics of a dedicated physical channel (hereafter "TFI1" or "TFCI1") as well as of a shared physical channel (hereafter "TFI2" or "TFCI2"). Again, a TFI or a TFCI is just an example of a control message, and other control messages as well as other types of control information may be used. Using a TFI example for purposes of illustration only, an SRNC determines a TFI1 for each dedicated transport channel, and a DRNC determines the TFI2 for each shared transport channel. The base station maps the TFI1 information for all dedicated transport channels (if any) to a TFCI1. Similarly, the base station maps the TFI2 information for other shared transport channels (if any) to a TFCI2. If there is only one dedicated transport channel and one shared transport channel, the TFCI1 corresponds to

one TFCI1 value, and the TFCI2 corresponds to one TFI2 value. Both the TFCI1 and the TFCI2 are provided to the UE terminal by the BS on a dedicated physical radio channel.

After receiving the TFCI1 control information over the dedicated physical control channel, the UE terminal knows how the different transport channels are multiplexed onto the dedicated physical radio channel. The UE is also aware of the downlink physical channel resources, (e.g., spreading factor, channelization code, etc.), that are allocated when the radio link is first set up. With this information, the UE terminal can receive and demodulate information transmitted over the dedicated radio channel.

On the other hand, a shared radio channel may use one of several radio resources, (e.g., one of several radio channel WCDMA spreading codes), based on the current radio resource scheduling by the CRNC. Because it is impractical for the UE terminal to know and check for information regarding all the radio resource(s) currently selected for use by the CRNC, the UE terminal is informed of the currently used radio resources for the shared physical channels, in this example, using the TFCI2 control message. The TFCI2 may identify for the UE terminal the particular radio resources, (e.g., spreading codes), to be used by the common/shared physical radio channel at a certain future moment in time. The TFCI2 may also indicate the time or multiplexing position within the identified frame that corresponds to the information directed to the mobile unit which should be decoded.

Typically, the TFCI 1 and TFCI 2 information is an index to a look-up table provided to and stored in the mobile radio unit during the time that a connection is established between a core network and the mobile unit. Information in the look-up table includes individually addressable entries of radio resource identification, e.g., a channelization code and corresponding spreading factor, as well as multiplexing or timing information that identify which portions of a particular frame on the shared radio channel contain information for the particular mobile radio unit. The TFCI index is used to address that look-up table and retrieve the corresponding information used by the mobile radio to then receive and properly decode information intended for it from the shared radio channel.

A description of TFIs and TFCIs may be found in the 3GPP RAN2 specification entitled "Service Provided by the Physical Layer," 25.302, revision v.3.3.0, incorporated herein by reference. Fig. 2 shows an example TFI message format in a signaling control frame. An eight bit field indicates a connection frame number (CFN) followed by a TFI or TFCI indicator. The TFI and/or TFCI may be used to address control information previously stored in a look-up table in the mobile radio as described above. This reduces the amount of data to be transmit over the radio interface. Of course, control information could be communicated directly rather than indirectly. Optional Spare and Spare Extension bit fields are also shown.

One approach for communicating TFCI2 information is for the DRNC to insert the TFCI2 into the information stream to be transmitted on the dedicated physical radio channel. The BS then transmits both the TFCI1 and TFCI2 on the dedicated radio physical channel over the radio interface. Fig. 3 illustrates this approach. The scheduled data and the TFI1 control information to be transported on a dedicated physical traffic radio channel are received at the DRNC on a corresponding transport bearer. See the solid line in the transport bearer (shown as a tube) between the SRNC 14 and DRNC16. The DRNC inserts the TFCI2 into that information stream before it is forwarded to the BS via the same transport bearer (shown as a dashed line in a tube) between DRNC 16 and BS2 20. This approach for conveying the TFCI2 data, however, has some drawbacks.

First, insertion of the TFCI2 by the DRNC is inconsistent with a RAN architecture in which control and traffic information related to a dedicated physical channel are transported between SRNC and BS by "transparently" passing through the DRNC. If the DRNC must insert the TFCI2, it is no longer transparent. Instead, the DRNC must be knowledgeable of the data content it receives and forwards, which increases the complexity of and the delay caused by the DRNC.

Second, if the TFCI2 information arrives too late at the BS, the BS will send a timing adjustment request in the uplink direction to the RNC. All uplink information from the BS related to dedicated physical channels is supposed to be passed transparently to the SRNC. Accordingly, the timing adjustment request is transparently passed from the

BS by the DRNC to the SRNC. However, it is the DRNC — not the SRNC — that should perform the timing adjustment function. The DRNC adds the TFCI2 to the downlink information stream to be transported over the dedicated physical radio channel.

Third, insertion of the TFCI2 by the DRNC handicaps potential changes to the RAN configuration. One such change envisioned by the inventors of the present invention is described further below in conjunction with Fig. 7. That change includes establishing a direct transport bearer between the SRNC and a BS for transporting information related to a dedicated physical channel. Although such a direct transport bearer may have some disadvantages, (e.g., combining/splitting are not possible in the DRNC if needed), the benefits of such a solution may outweigh the drawbacks. Example benefits might include a decreased load on the DRNC and a decreased transport delay on the dedicated physical channel in the RAN, i.e., no DRNC processing and buffering delay. In any event, this approach eliminates the need to include the DRNC in the transport bearer route for data to be transported on a dedicated physical radio channel.

To overcome these drawbacks and limitations, (and perhaps others), the present invention employs a separate transport bearer between a controlling-RNC (CRNC) and a BS to transport CRNC-originated control information that is to be transmitted by the BS to the mobile terminal on a dedicated physical radio channel. Fig. 4 illustrates an example of such a separate transport bearer (the thick dashed line) between a DRNC (the controlling RNC for BS2) and BS2 that conveys such information, e.g., TFCI2 control information originated in the DRNC. Although not shown, in a configuration that includes only an SRNC and a base station, (i.e., there is no DRNC supporting the connection), it may be appropriate or otherwise desirable to establish a separate transport bearer to carry the control information such as TFI information generated by the SRNC.

Although the invention may transmit various types of control information over the separate transport bearer, the non-limiting, example described hereafter is TFCI2 control information. Rather than inserting the TFCI2 (or other control information) into the information stream related to the dedicated physical channels, a separate transport bearer is

established from the DRNC to the BS (the thick dashed line) to convey the control information, e.g., the TFCI2.

There are three transport bearers established between the DRNC 16 and the base station 20. A first transport bearer carries to the DRNC scheduled data to be transported on a shared radio channel, like the DSCH. A second transport bearer transports the SRNC-scheduled data to be transported on a dedicated radio channel, such as the DCH, along with control information originated at the SRNC, such as the TFI1. The third transport bearer transports the control information originated at the DRNC 16, which in this case, is the TFCI2.

A Transport Information procedure (block 100) is now described in conjunction with the flowchart illustrated in Fig. 5. A transport bearer request is received at the RAN to establish a transport bearer between a particular UE mobile radio and a core network (block 102). A decision is made (block 104) whether the UE is in the cell under the control of the drift RNC. Of course, the connection is initially established by way of a serving RNC and a base station cell under the control of that serving RNC. However, through movement of the UE during the lifetime of the connection, it may be handed over to a cell under the control of a drift RNC.

If there has been no handover to a DRNC cell, the SRNC schedules user data for transmission over a dedicated radio channel and a shared radio channel, e.g., DCH and DSCH, respectively (block 106). The shared radio channel handles transmission of bursty traffic (like WWW data) sent to UEs more efficiently than a dedicated channel. The SRNC establishes a transport bearer to transport the DCH data as well as control information for the DCH and possibly also the DSCH, e.g., TFI1 and TFI2 (block 108). The SRNC also establishes a transport bearer to transport the DSCH data (and possibly some control information) (block 110).

If the UE is in a cell under the control of a drift RNC (DRNC), the SRNC schedules the DCH data and the DRNC schedules the DSCH data (block 112). The DRNC establishes a separate transport bearer between the DRNC and the base station to

convey DRNC-originated control information (e.g., TFCI2) (block 114). Other transport bearers are established between the DRNC and base station to transport DCH and DSCH information (block 116).

This example implementation of the present invention can be further implemented using appropriate signaling between the SRNC, DRNC, and base station (sometimes referred to as "node B"). Fig. 6 illustrates an example signaling diagram. The SRNC communicates with the DRNC using a Radio Network Subsystem Application Protocol (RNSAP). The DRNC communicates with the base station (node B) using a Node B Application Protocol (NBAP). An ALCAP protocol is used to establish transport bearers in the RAN.

An RL_SETUP_REQUEST message is sent from the SRNC to the DRNC along with a specific request for a DCH transport bearer and a DSCH transport bearer. The DRNC sends a corresponding message RL_SETUP_REQUEST to the base station node B and includes a TFCI2 transport bearer request along with the DCH and DSCH transport bearer requests. The base station returns an RL_SETUP_RESPONSE message to the DRNC and includes DCH, DSCH, and TFCI2 transport bearer parameters, e.g., transport layer addresses, binding identifiers, etc. The DRNC sends an RL_SETUP_RESPONSE message to the SRNC including the DCH and DSCH transport bearer parameters. Accordingly, DCH and DSCH transport bearers are established between the SRNC and DRNC using ALCAP signaling. DCH, DSCH, and TFCI2 transport bearers are established between the DRNC and the base station node B also using ALCAP signaling.

Fig. 7 illustrates another non-limiting, example RAN implementation where data to be transmitted on a dedicated physical radio channel is transported in the RAN directly from the SRNC to the BS, along with any associated control information, e.g., the TFCI1. In Fig. 7, however, the direct transport bearer between the SRNC and the BS to transport dedicated physical channel information eliminates the need to relay this information through the DRNC. By not routing the transport bearer through an intermediate DRNC node, internal RAN transport delay is decreased. Thus, BS2 receives the TFI1 information

directly from the SRNC. However, because a separate transport bearer is established between the DRNC and BS2 to carry DRNC-originated control information relating to the DSCH data, the TFCI2 control information may also be communicated to BS.

A separate control information transport bearer does not need to be used in all
5 situations. If the CRNC corresponds to the SRNC, the CRNC-originated control information to be transmitted on a dedicated physical channel over the radio interface may be multiplexed on the direct Iub transport bearer from the SRNC to the BS along with the dedicated physical channel information. A separate transport bearer could also be used. If the CRNC is a DRNC tasked with transmitting non-scheduled data via a shared physical
10 channel, and with generating control information to be transmitted on the dedicated physical channels over the radio interface, the DRNC establishes a separate transport bearer to transport DRNC-originated control information. Consequently, control information originated by the DRNC is simply sent by way of the separate transport bearer. Data received from the SRNC is quickly and transparently passed through the
15 DRNC to the base station. In addition, the DRNC, and not the SRNC, is able to perform any timing adjustment functions required by the base station for data which is scheduled by the DRNC. Also, the invention allows flexibility with potential changes to the RAN configuration, an example of which was just described above in conjunction with Fig. 7. Namely, the dedicated channel data can go directly from the SRNC to the base station
20 even though the shared channel scheduling is done in the CRNC. This configuration reduces delays in handling of dedicated channel data.

While the present invention has been described with respect to a particular embodiment, those skilled in the art will recognize that the present invention is not limited to the specific example embodiments described and illustrated herein. Again, the
25 invention is not limited to the TFI and/or TFCI examples provided above. Different formats, embodiments, and adaptations besides those shown and described as well as many modifications, variations, and equivalent arrangements may also be used to implement the invention.

WHAT IS CLAIMED IS:

1. In a radio access network (RAN) (10) where information may be sent to a mobile radio unit (22) using a shared radio channel shared by other mobile radio units, a method characterized by:

5 establishing between a first RAN node and a second RAN node a first transport bearer to transport data to be transmitted on the shared radio channel, and

establishing between the first RAN node and the second RAN node a second transport bearer to transport control information originated in the first RAN node relating to the first transport bearer data.

10 2. The method in claim 1, further comprising:
the first RAN node transmitting the control information over the second transport bearer to the second RAN node.

3. The method in claim 1, wherein the control information includes scheduling information.

15 4. The method in claim 1, wherein the control information indicates
information needed by the mobile radio unit to decode the data transmitted over the shared radio channel.

20 5. The method in claim 4, wherein the needed information includes one or more of the following: a frame identifier, a radio channel identifier, and an indication of
how different radio channels are multiplexed on the identified frame.

6. The method in claim 1, wherein the control information includes transport format information.

7. The method in claim 1, wherein the control information includes a transport format indicator.

25 8. The method in claim 7, wherein the transport format indicator includes a frame identifier and an index to a lookup table stored in the mobile radio unit containing

information relating to how a transport channel is multiplexed on the shared radio channel, wherein the shared radio channel is specified by a channelization code and a spreading factor.

9. The method in claim 1, wherein the first RAN node is a drift radio network
5 controller (DRNC) (16) and the second RAN node is a base station (BS) (20).

10. The method in claim 1, wherein information may be sent to the mobile
radio unit using a dedicated radio channel, the method further comprising:
establishing a third transport bearer to carry dedicated radio channel data and
dedicated radio channel control information through the RAN for transmission to the
10 mobile radio unit on the dedicated radio channel.

11. The method in claim 10, wherein the dedicated radio channel carries the
dedicated control information and the control information originated at the first node to
the mobile radio unit.

12. The method in claim 10, wherein the first RAN node is a drift radio network
15 controller (DRNC) (16) and the second RAN node is a base station (BS) (20), and wherein
the RAN includes a third RAN node corresponding to a serving radio network controller
(SRNC) (14) coupled to the DRNC, the method further comprising:
the SRNC providing data to be transmitted to one or more mobile radio units to
the DRNC over the third transport bearer.

20 13. The method in claim 11, wherein the third transport bearer is established
between the SRNC and the DRNC and between the DRNC and the BS.

14. The method in claim 11, wherein the third transport bearer is established
between the SRNC and the BS.

15. The method in claim 1, wherein the first RAN node is a drift radio network
25 controller (DRNC) (16), and the DRNC-originated information relates to the information
supervised by the DRNC.

16. The method in claim 15, wherein the DRNC-originated information is a traffic format indication message originated by the DRNC.

17. The method in claim 16, wherein the traffic format indication message originated by the DRNC instructs the mobile radio unit how to receive information on the
5 shared radio channel.

18. A computer-generated data signal embodied in an electrical signal transported on a radio access network (RAN) transport bearer established between a first RAN node corresponding to a drift radio network controller (16) and a second RAN node corresponding to a base station (20), comprising:

10 a frame number field including a specific frame number corresponding to a frame on a radio channel, and

a transport format field including information relating to a particular radio channel resource useable by a mobile radio unit to receive information directed to the mobile radio unit.

15 19. The computer-generated data signal in claim 18, wherein the transport format field includes information that may be used to address a transport format table stored in a mobile radio unit (22).

20 20. The computer-generated data signal in claim 18, wherein the transport format field contains information that may be used by a mobile radio unit to receive information intended for the mobile radio unit carried on a shared radio channel.

21. The computer-generated data signal in claim 18, wherein the transport format field includes a transport format combination indicator (TFCI) generated by the drift radio network controller.

25 22. In a radio access network (RAN) (10) where information may be sent to one or more mobile radio units (22) using a shared radio channel, a RAN node for communicating with a base station (20), comprising:

a controller (16) configured to establish a first transport bearer to the base station to transport data to be transmitted on the shared radio channel, and to establish a second transport bearer to the base station to transport control information originated in the RAN node.

5 23. The RAN node in claim 22, wherein the control information indicates to a mobile radio unit receiving transmissions from the base station information needed to decode information transmitted over the shared radio channel.

10 24. The RAN node in claim 23, wherein the needed information includes one or more of the following: a frame identifier, a radio channel identifier, and an indication of how different radio channels are multiplexed on the identified frame.

25 25. The RAN node in claim 22, wherein the control information includes transport format information.

26 26. The RAN node in claim 25, wherein the control information includes a transport format indicator.

15 27. The RAN node in claim 26, wherein the transport format indicator includes a frame identifier and information that is useable by a mobile radio to address a lookup table stored in the mobile radio containing information relating to how a radio channel is multiplexed in the identified frame, wherein the radio channel is specified by a channelization code and a spreading factor.

20 28. The RAN node in claim 22, wherein the first RAN node is a drift radio network controller (DRNC) (16) configured to communicate with a serving RNC (SRNC) (14).

25 29. The RAN node in claim 28, wherein the controller is configured to establish a third transport bearer to the base station to transmit data to be transmitted on a dedicated radio channel.

30. The RAN node in claim 22 in conjunction with the radio access network, wherein the RAN further comprises:

5 a serving radio network controller (SRNC) (14) for initially establishing a connection with a mobile radio unit over a radio interface, where the first RAN node is a drift radio network controller (DRNC) (16) for providing resources to the SRNC to support the connection,


10 wherein the DRNC is configured to establish the first transport bearer to transport the connection information from the DRNC to the base station on the shared radio channel and the second transport bearer to transport control information related to the connection information from DRNC to the base station.

31. The radio access network in claim 30, wherein the SRNC is configured to establish a third transport bearer to carry connection information to be transmitted on a dedicated radio channel between the base station and the mobile radio unit.

15 32. The radio access network in claim 31, wherein the SRNC is configured to establish the third transport bearer with the base station.

33. The radio access network in claim 31, wherein the SRNC is configured to establish the third transport bearer with the base station by way of the DRNC.

1/6

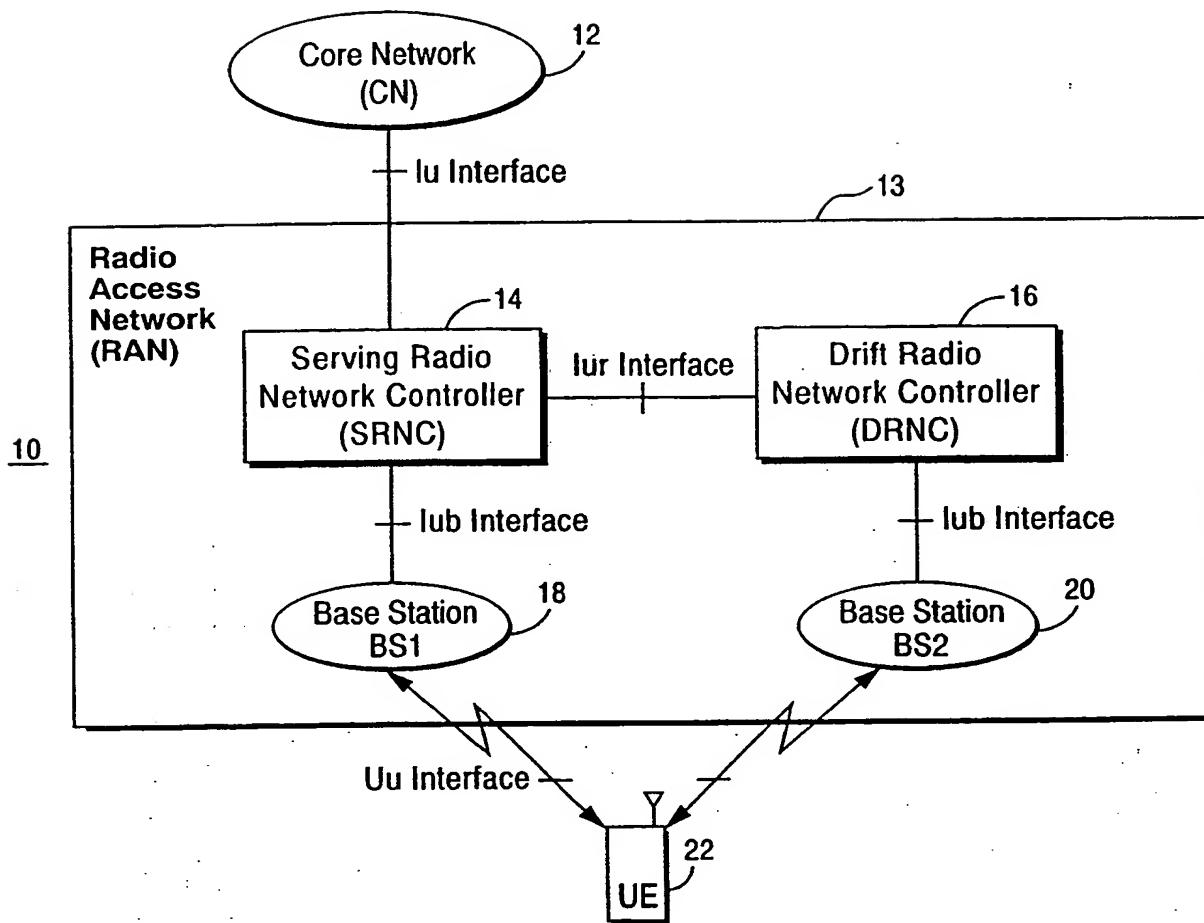**FIG. 1**

Connection Frame Number (CFN)
TFI or TFCI
Spare
Spare Extension

FIG. 2









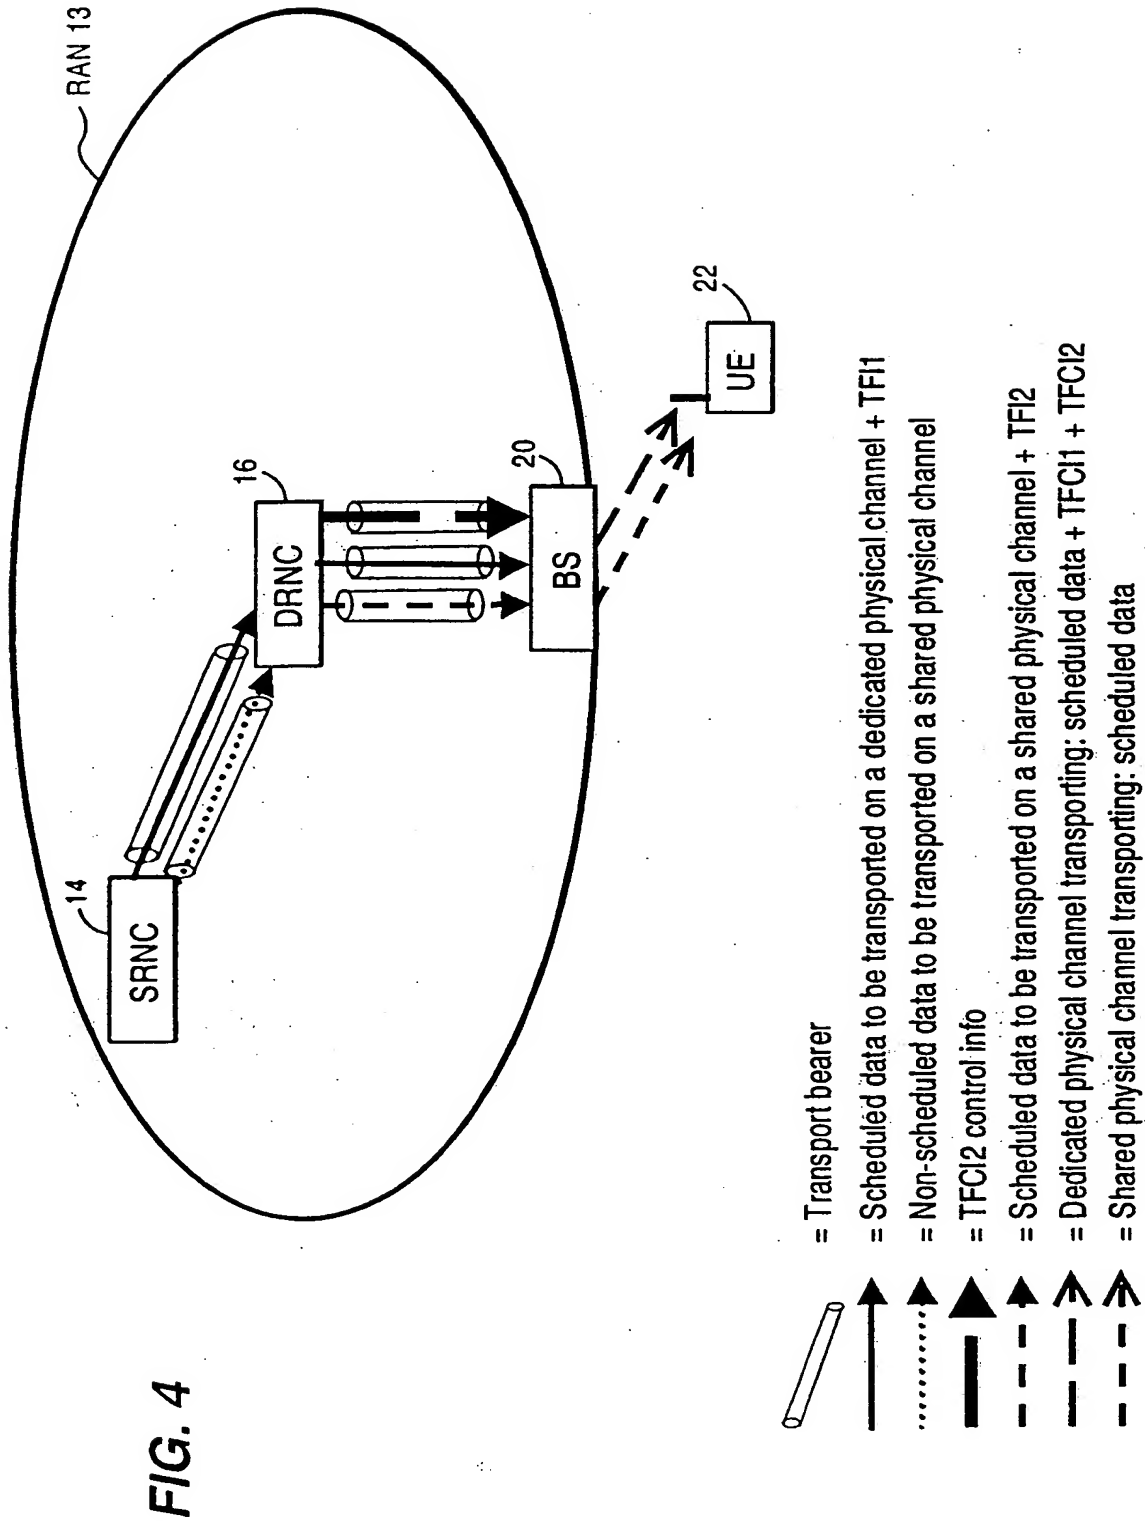
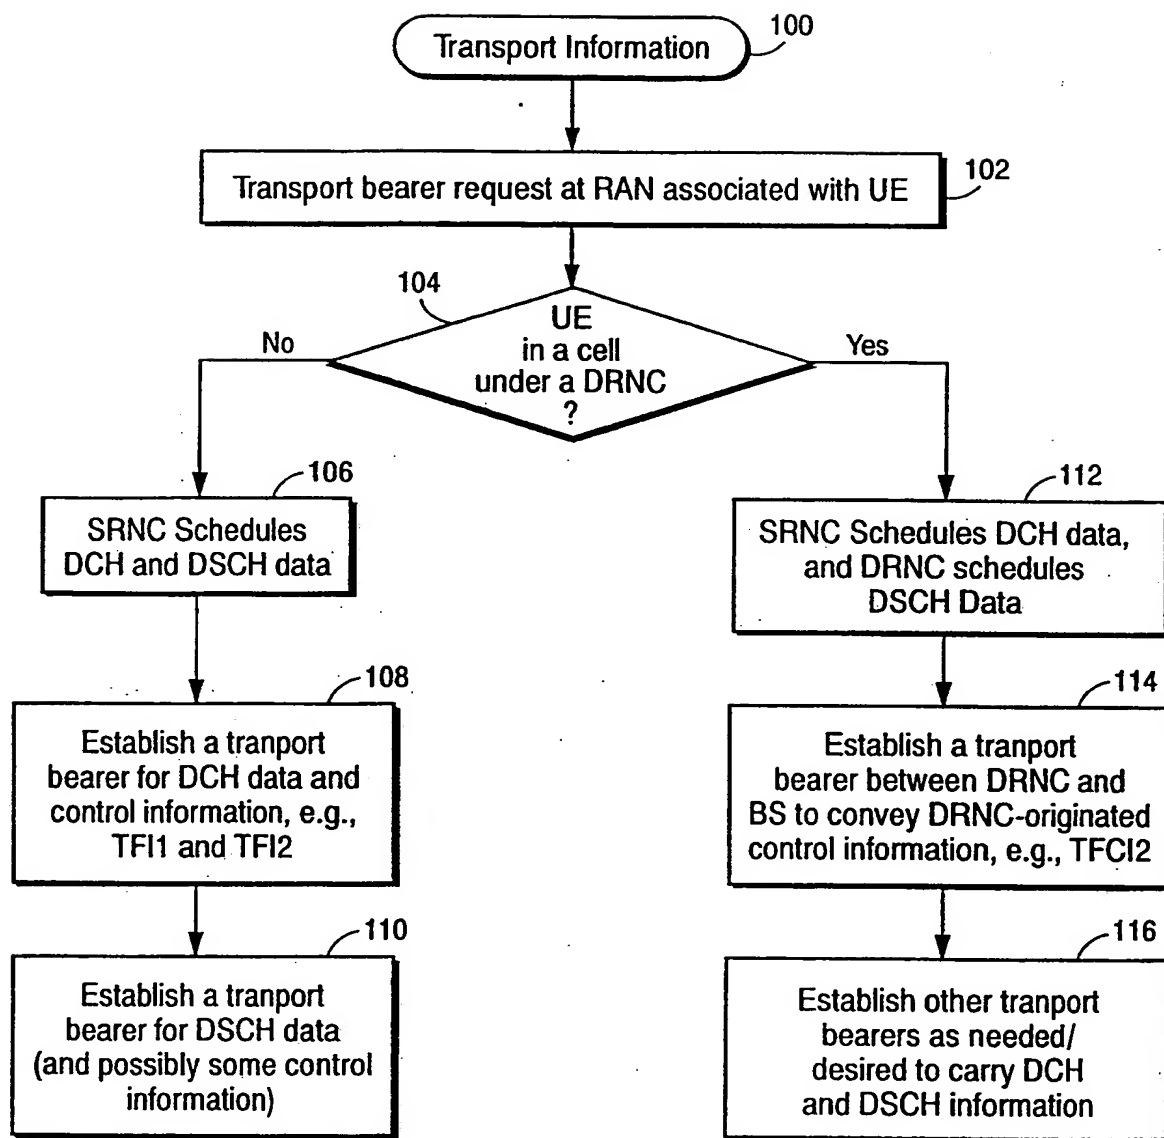


FIG. 3

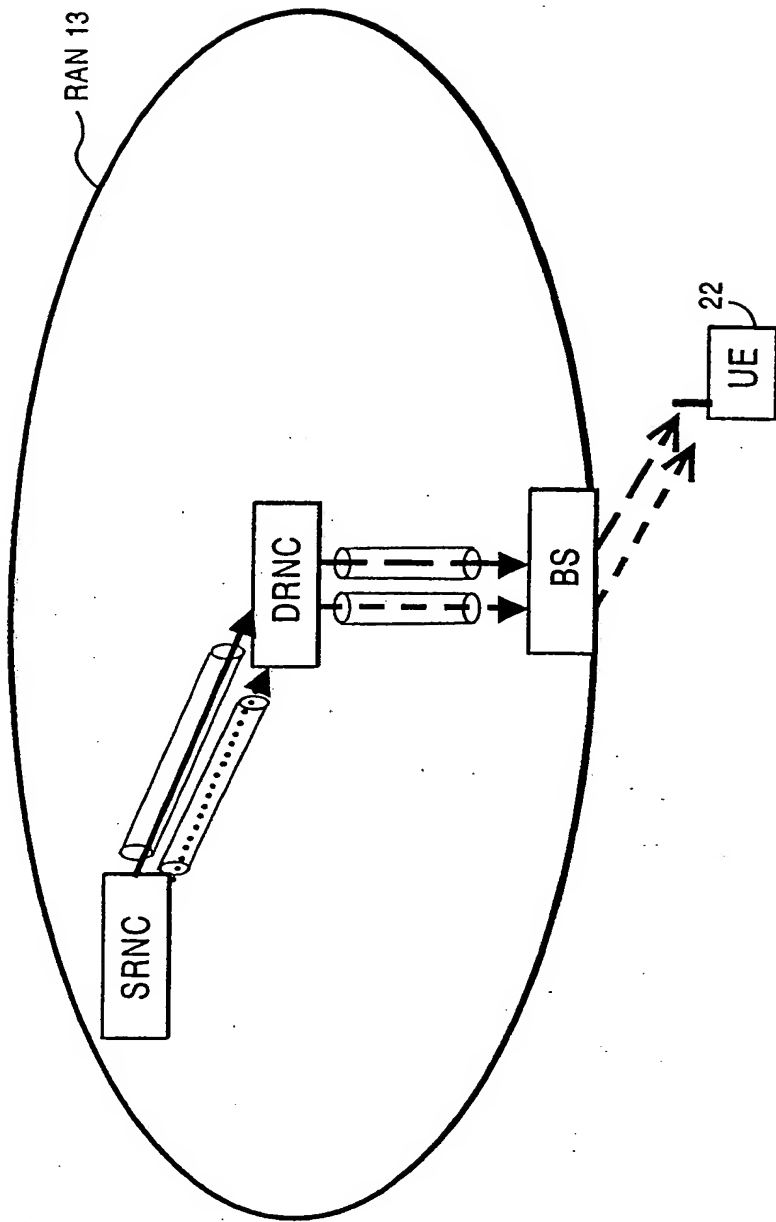-  = Transport bearer
-  = Scheduled data to be transported on a dedicated physical channel + TFI1
-  = Non-scheduled data to be transported on a shared physical channel
-  = Scheduled data to be transported on a dedicated physical channel + TFI1 + TFCI2
-  = Scheduled data to be transported on a shared physical channel + TFI2
-  = Dedicated physical channel transporting: scheduled data + TFCI1 + TFCI2
-  = Shared physical channel transporting: scheduled data



4/6

**FIG. 5**

5/6


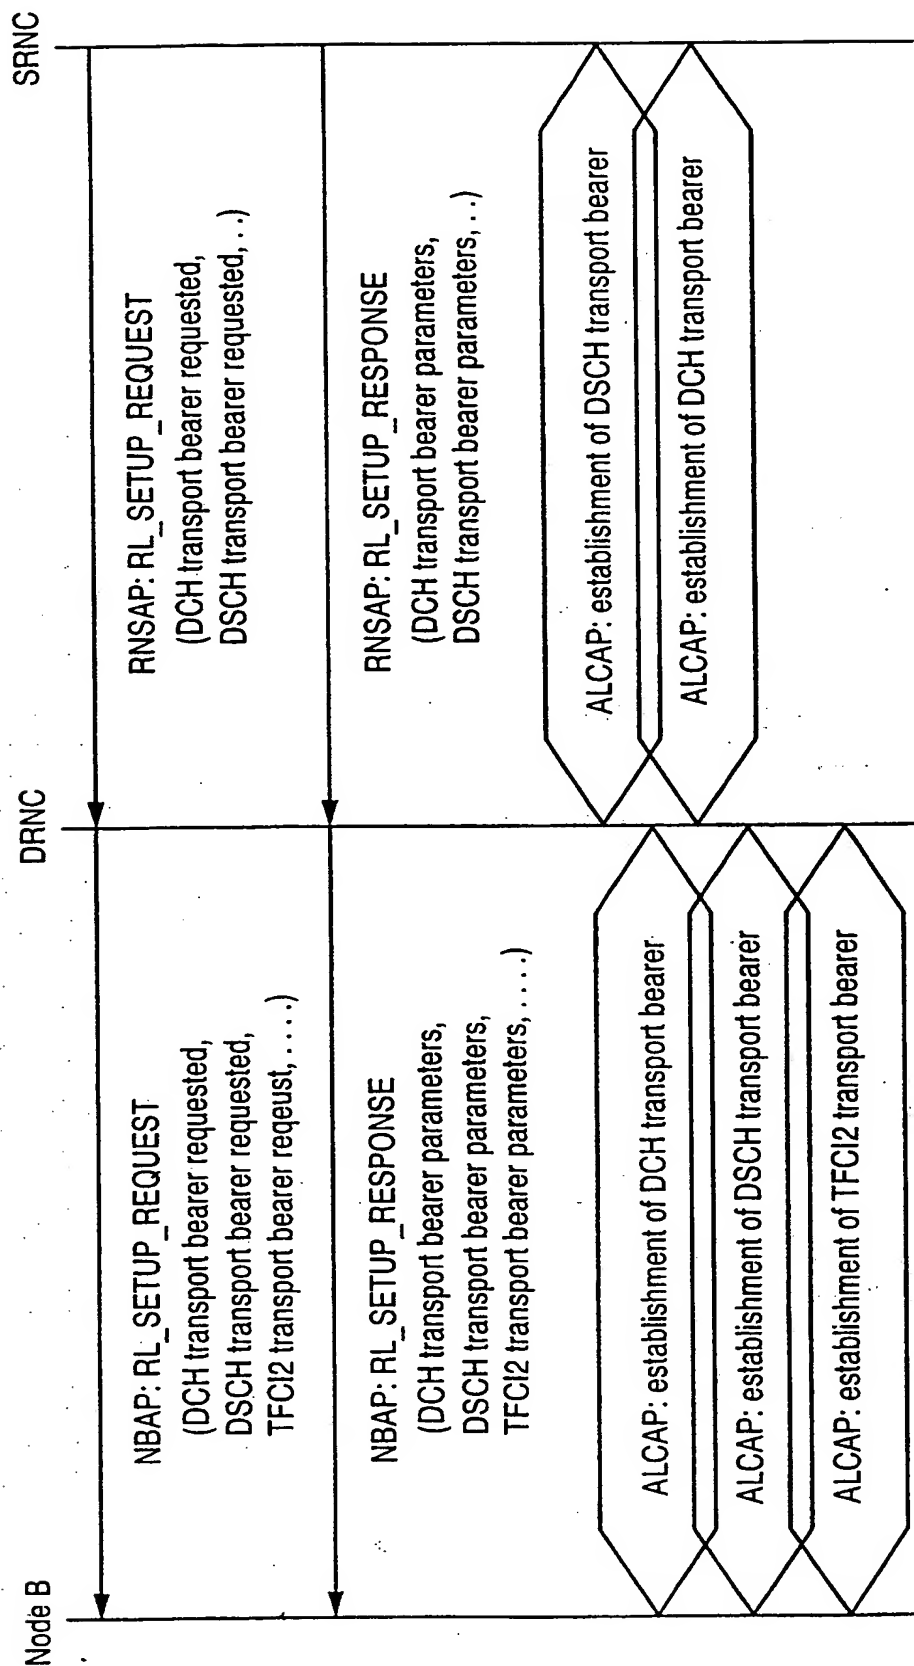


FIG. 6

FIG. 7



(19) World Intellectual Property Organization
International Bureau

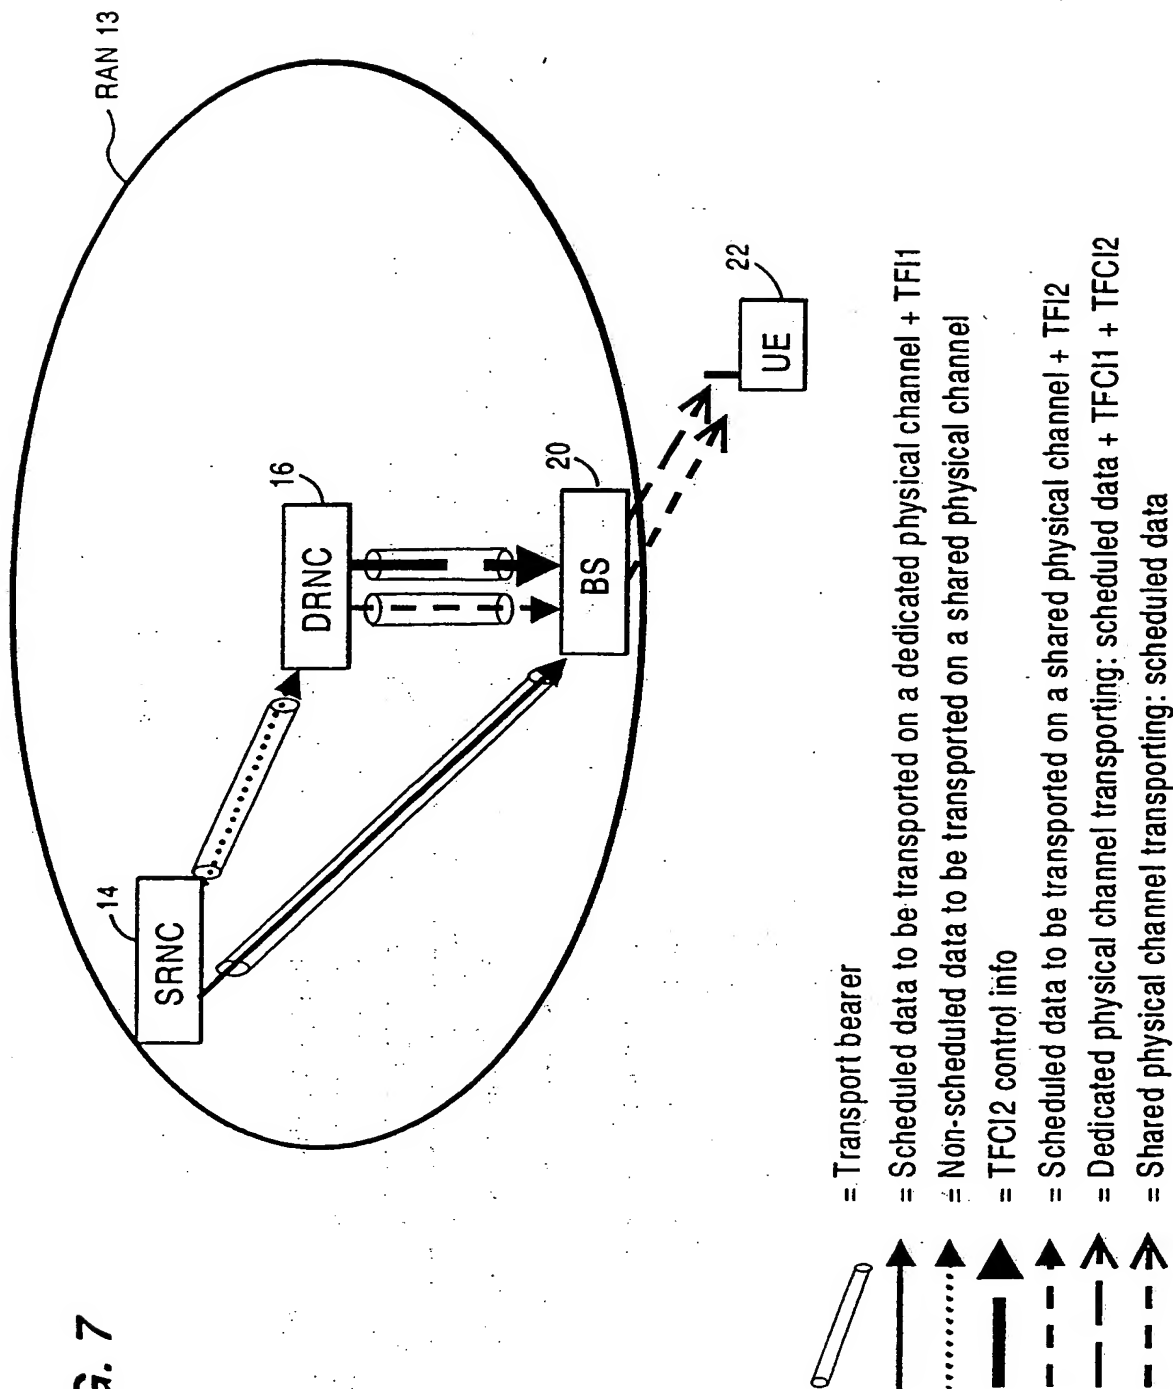

(43) International Publication Date
27 September 2001 (27.09.2001)

PCT

(10) International Publication Number
WO 01/72057 A3

(51) International Patent Classification⁷: **H04Q 7/00**

(21) International Application Number: PCT/SE01/00552

(22) International Filing Date: 16 March 2001 (16.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/190,097	20 March 2000 (20.03.2000)	US
60/191,499	23 March 2000 (23.03.2000)	US
09/801,869	9 March 2001 (09.03.2001)	US

(71) Applicant: **TELEFONAKTIEBOLAGET LM ERICSSON** (publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors: **RUNE, Göran**; Sandgårdsgatan 5A, S-582 52 Linköping (SE). **WILLARS, Per**; Rindögatan 19, S-115 36 Stockholm (SE). **VAN LIESHOUT, Gert-Jan**; Soerenweg 40, NL-7314 CG Apeldoorn (NL).

(74) Agent: **MAGNUSSON, Monica**; Ericsson Radio Systems AB, Patent Unit Radio Access, S-164 80 Stockholm (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
7 February 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **TRANSPORT OF RADIO NETWORK-ORIGINATED CONTROL INFORMATION**

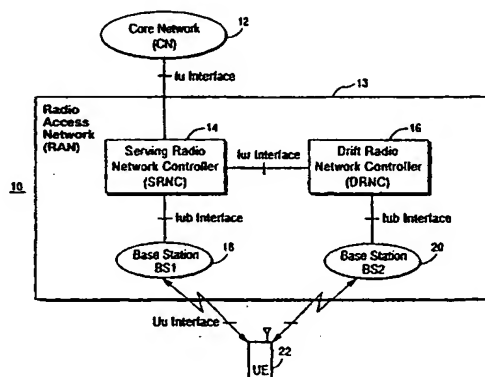

(57) Abstract: In a radio access network (RAN) where information may be sent to a mobile radio unit using a shared radio channel shared by other mobile radio units, a first transport bearer is established between a first RAN node, e.g., a drift RNC, and a second RAN node, e.g., a base station, to transport data to be transmitted on the shared radio channel. A second transport bearer is established between the first and second RAN nodes to transport control information originated in the first RAN node that relates to the first transport bearer data. The first RAN node then transmits the control information over the second transport bearer to the second RAN node. The control information might include, for example, scheduling information known to the first RAN node because the first RAN node supervises scheduling of data to be transmitted on the shared radio channel. The control information may provide to the mobile radio unit information needed to decode the data transmitted on the shared radio channel. Such needed information might include, for example, a frame identifier, a specific radio resource like a spreading code, and/or an indication of how different radio resources associated with different connections are multiplexed on the shared radio channel. In one example, non-limiting embodiment, the control information includes transport format indication information such as transmit format combination indicator (TFCI) information employed in third generation Universal Mobile Telephone Systems (UMTS) in accordance with the 3GPP specification.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 01/00552

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	DE 19931131 A1 (SIEMENS AG), 18 January 2001 (18.01.01), abstract --	1-33
A	WO 9953704 A1 (NOKIA TELECOMMUNICATIONS OY), 21 October 1999 (21.10.99), abstract --	1-33
A	EP 0660546 A1 (PHILIPS ELECTRONICS N.V.), 28 June 1995 (28.06.95), page 2, line 25 - page 3, line 5 --	1-33

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 October 2001

Date of mailing of the international search report

13. 11. 2001

Name and mailing address of the International Searching Authority
European Patent Office P.B. 5818 Patentlaan 2
NL-2280 HV Rijswijk
Tel: (+31-70) 340-2040, Tx 31 651 epo nl,
Fax: (+31-70) 340-3016
e: epo@ipo.nl

Authorized officer

Stefan Hansson/JAn
Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 01/00552

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6002919 A (POSTI), 14 December 1999 (14.12.99), abstract -----	1-33

SA 8656

INTERNATIONAL SEARCH REPORT

Information on patent family members

01/10/01

International application No.

PCT/SE 01/00552

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
DE	19931131	A1	18/01/01	NONE	

WO	9953704	A1	21/10/99	AU 3422299 A	01/11/99
				CN 1298613 T	06/06/01
				EP 1070431 A	24/01/01
				FI 107504 B	00/00/00
				FI 980828 A	10/10/99

EP	0660546	A1	28/06/95	BE 1007910 A	14/11/95
				JP 7264160 A	13/10/95
				US 5581554 A	03/12/96

US	6002919	A	14/12/99	AU 700052 B	17/12/98
				AU 4348796 A	31/07/96
				CN 1168214 A	17/12/97
				EP 0801872 A	22/10/97
				FI 1987 U	06/07/95
				FI 100077 B	00/00/00
				FI 950047 A,V	05/07/96
				JP 11514505 T	07/12/99
				NO 973094 A	03/09/97
				US 5697119 A	16/12/97
				WO 9621998 A	18/07/96
